


Product Overview

Conductor Rails

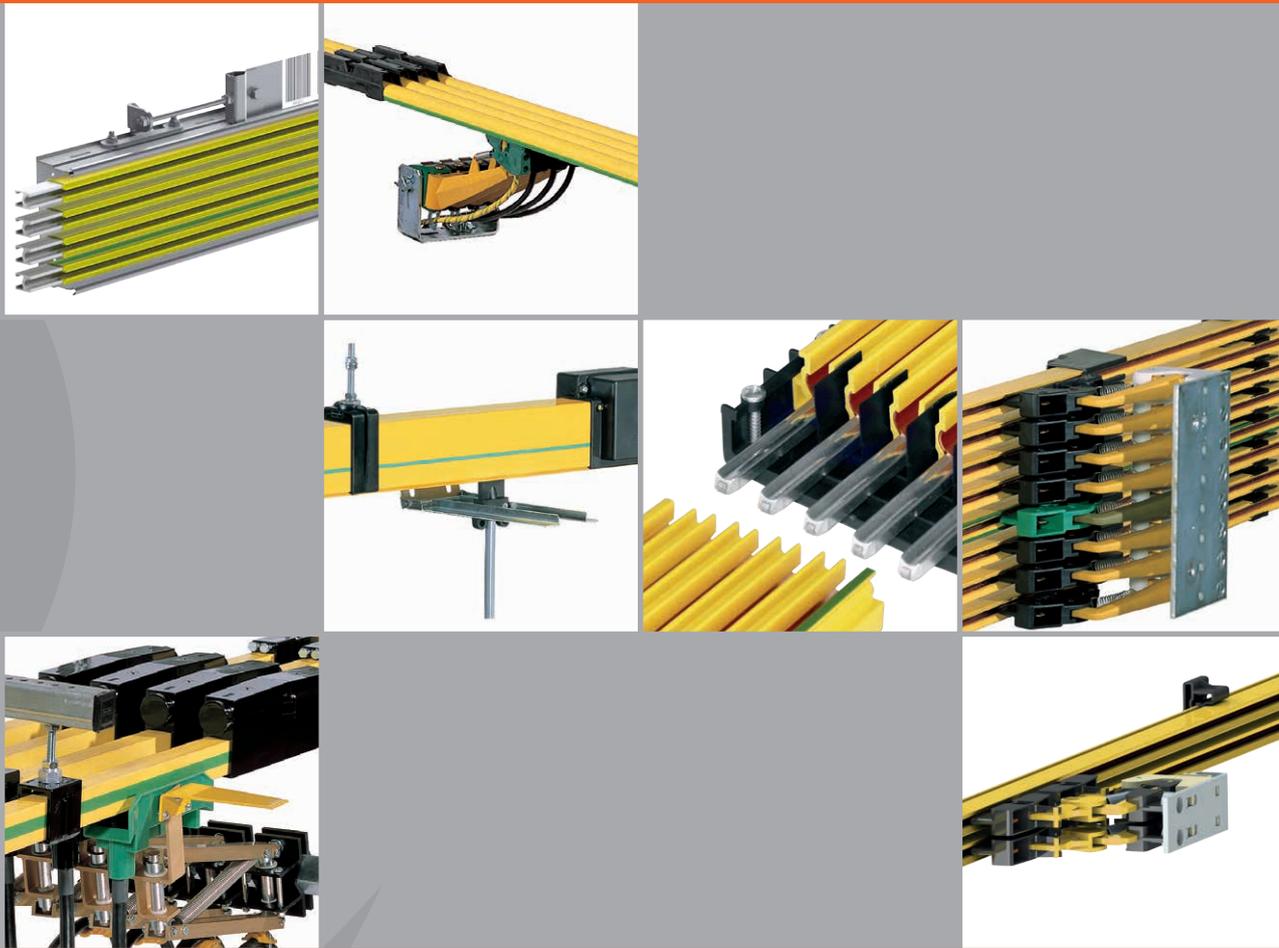

CONDUCTIX
wampfler

DELACHAUX GROUP



SingleFlexLine 0811 on an electrified monorail system in a brewery

The Simple Solution!

Insulated conductor rails are one of the most widely used systems for the transmission of power and data. Conductor rail solutions from Conductix-Wampfler are in use in a variety of systems around the world.


Whether on automotive production lines, in a variety of crane systems, in packing machines, in high-storage warehouses, in the infrastructure of airport terminals, or in amusement park rides – people count on Conductix-Wampfler conductor rails, and not without reason.

These features of the product line, along with a strict standard of quality and more than 30 years of experience (in the development, production, and application of contact-safe conductor rails) form the basis of a successful relationship with our customers.

The modular structure of the systems and nearly limitless expandability in the number of poles and the length of the system are what make this universally adaptable.



We can wind you up!
SingleFlexLine 0815
in a packaging machine

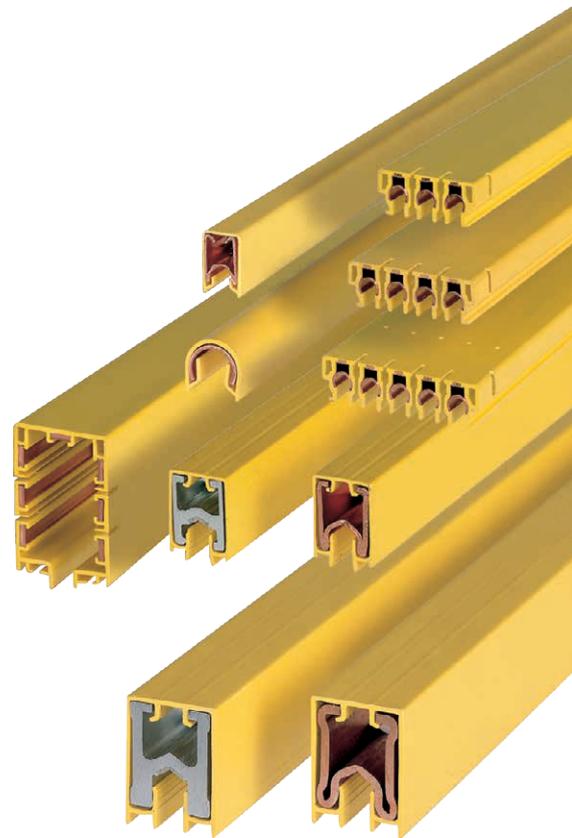

We lift you up!
SinglePowerLine 0812 on a people-mover
in a ski jump lift






We have profile!
The right system
for every application

Optimized Mounting Solutions

ProShell: systematic efficiency on AS/RS


ProShell is a modular, quick-assembly system that allows fast and secure integration of 0812 and 0831 conductor rails in the AS/RS aisles (on shelf uprights or floor mounting brackets).

- Protects the conductor rail system on three sides
- Keeps the rail system aligned, regardless of temperatures
- Mounting distances up to 3200 mm
- Secure and functional system interface between shelves and energy supply
- Up to 7 poles, 400 A (with rail program 0812)
- Slots for additional accessories, e.g. positioning systems, landmarks, etc.
- Fast mounting on the shelves or single-hole floor consoles

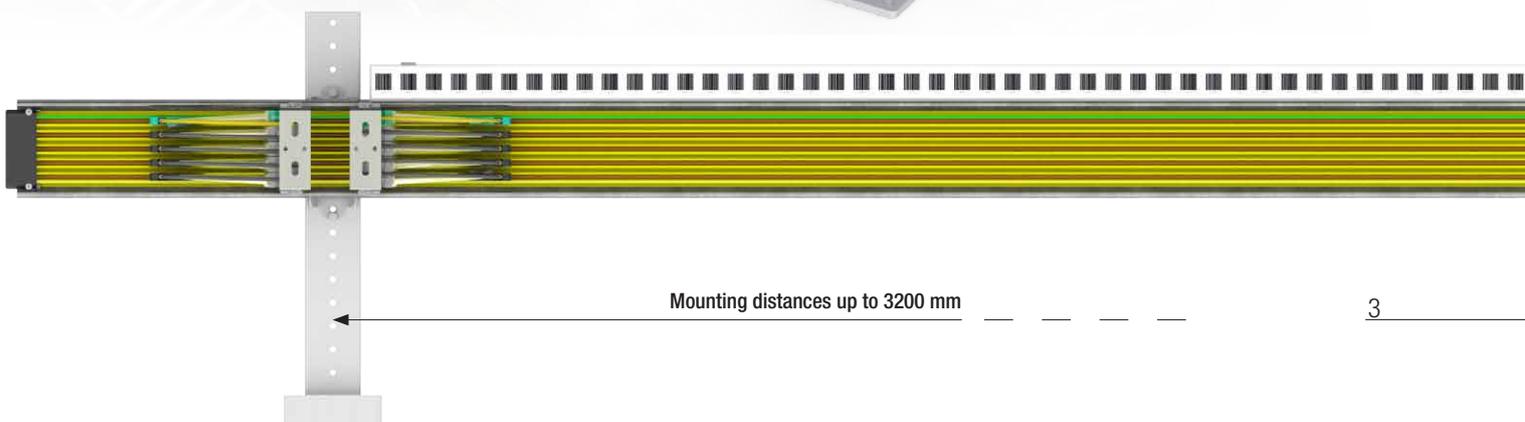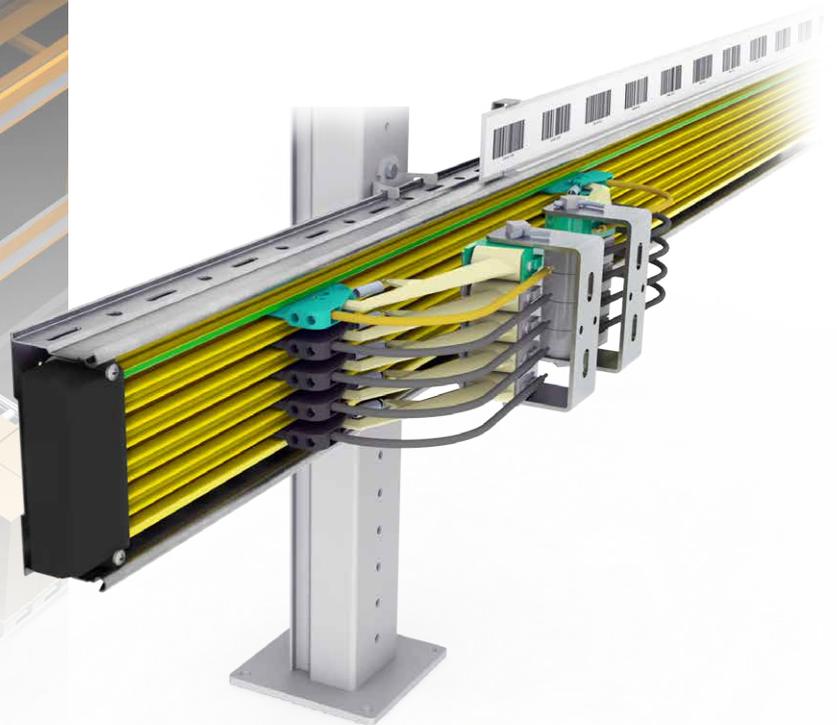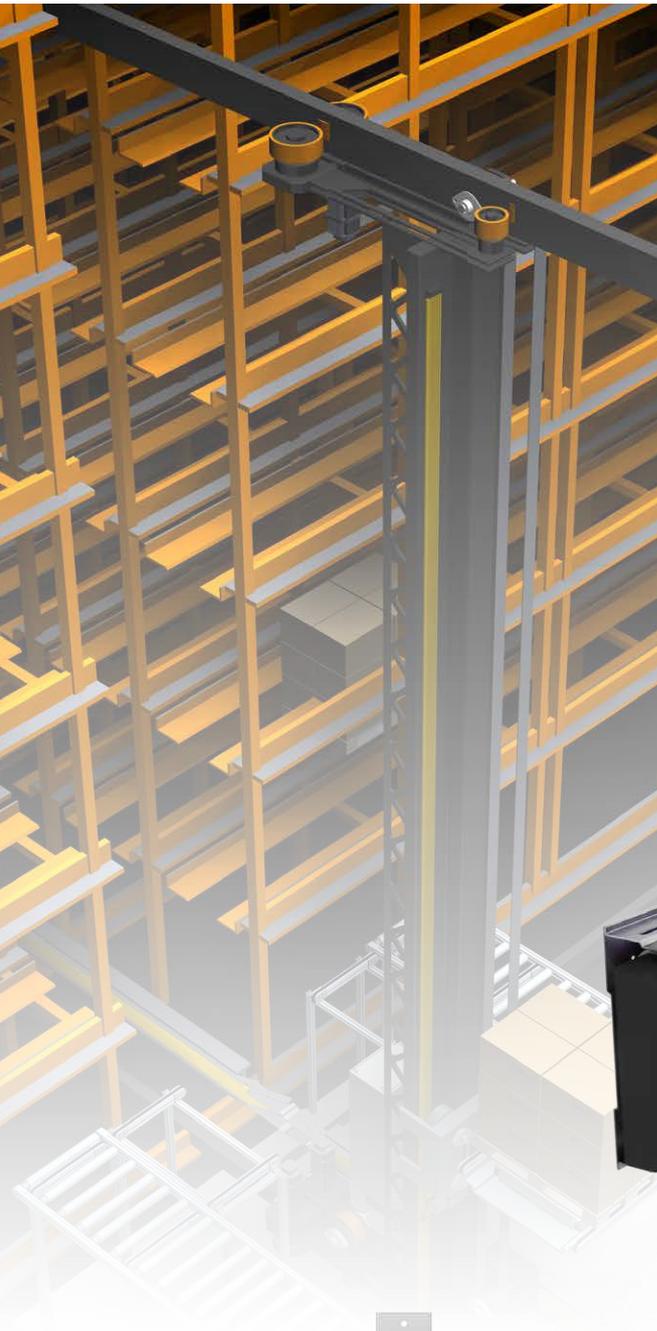

Mounting distances up to 3200 mm

System Structure



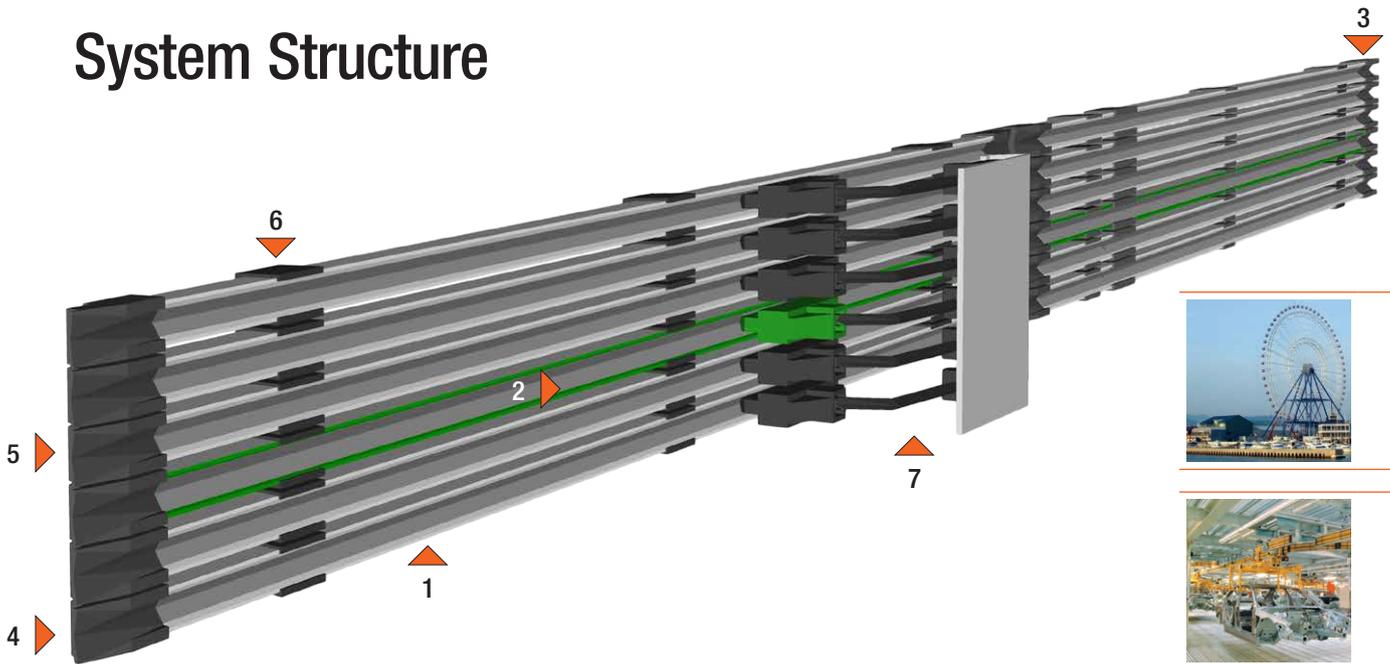


1. **Conductor rail with insulating profile** _____ with contact guard,
designed according to international standards
2. **PE ground pole** _____ optionally with protection against polarity errors
3. **Rail connector** _____ for the safe, quick connection of units
4. **End cap** _____ to terminate system ends and protect against contact
5. **Feed connector** _____ for convention connection to the stationary power supply
6. **Hanger clamp** _____ for smooth installation
7. **Collector assembly** _____ for safe transmission and compensation of movement tolerances
in positive guide and long service life



Product Line Overview – *No Limits!*

There are different product lines available to cover a variety of requirements.
 Modular in structure and flexible in use, we have the right solution for nearly any application.

SingleFlexLine	Program 0811	<p>Single-pole conductor rail for curving applications and ring arrangements</p> <ul style="list-style-type: none"> • Electrified monorail systems • Carousels • Sorters 		10 - 100 A
	Program 0815	<p>Single-pole conductor rail for curving applications and ring arrangements with limited installation space</p> <ul style="list-style-type: none"> • Electrified monorail systems • Packaging machines • Small parts warehouses 		32 - 100 A
SinglePowerLine	Program 0812	<p>Single-pole conductor rail for preferably straight rail runs</p> <ul style="list-style-type: none"> • Crane systems • Transport systems 		25 - 400 A
	Program 0813	<p>Single-pole conductor rail for preferably straight rail runs</p> <ul style="list-style-type: none"> • Crane systems • People movers 		200 - 1250 A
MultiLine	Program 0831	<p>Multi-pole, compact conductor rail for straight rail runs indoors</p> <ul style="list-style-type: none"> • High storage systems • Transfer cars • 3-4-5 poles 		10 - 125 A
MultiLine	Program 0835	<p>Multi-pole, modular small-scale conductor rail system</p> <ul style="list-style-type: none"> • Logistic shuttles • AS/RS for automatic small parts warehouses • 2 poles with/without protective conductor 		1 - 100 A
BoxLine	Program 0842	<p>Multi-pole, enclosed conductor rail for preferably straight rail runs</p> <ul style="list-style-type: none"> • Crane systems • Building maintenance units • 4-5-6-7 poles 		35 - 140 A
ProShell	For program 0812/ 0831	<p>Flexible substructure for program 0812/0831</p> <ul style="list-style-type: none"> • AS/RS and transfer cars • Mounting distances up to 3,2 m • up to 7 poles 		–

SingleFlexLine



The safety of full insulation and integrated contact protection, along with optional PE polarity error protection "PEplus"

Simple, precise installation with multipoled hanger clamps and bayonet connector technology

Unlimited number of poles, even for complex applications

Simple radial layout due to uncomplicated bending of rails at the construction site

Main applications:




- Electrified monorail systems
- Packaging machines
- Temporary buildings
- Ring rails / slip rings
- Revolving stages
- Small parts warehouses



1:1 scale

Standard application data

Nominal current range (100% duty cycle)	10 A 32 A 100 A
Nominal voltage	690 V
Rail length	4000 mm (different lengths optional)
Outer dimensions (pole)	14,7 x 15,5 mm
Area of use	Indoor or protected outdoor area
Rail layout	Any
Number of poles	No limit (system holders can be combined for 2, 3, 4, 5, or 6 poles)
Installation orientation	Collector insertion from side or bottom



SingleFlexLine



High degree of safety due to contact protection and optional PE polarity error protection "PE^{plus}"

Fast installation using plug or screw connectors

Compact, space-saving installation even in limited installation space, due to optimized phase distance of 12 mm or 14 mm

Fast, modular extension with multi-pole combinations of hanger clamps (2, 4, 6, 8, and 10 poles)

Flexible use thanks to simple adaptation to the load-bearing profile layout

Main applications:


- Electrified monorail systems
- Ring rails / slip rings
- Specialized machines
- Sorters and small parts warehouses



1:1 scale


Standard application data

Nominal current range (100% duty cycle)	32 A 100 A
Nominal voltage	690 V
Rail length	4000 mm
Outer dimensions (pole)	9,6 x 15,2 mm
Area of use	Indoors
Rail layout	Any
Number of poles	Any (monorail conveyors with 2, 4, 6, 8, or 10 poles)
Installation orientation	Collector insertion from side or bottom





SinglePowerLine

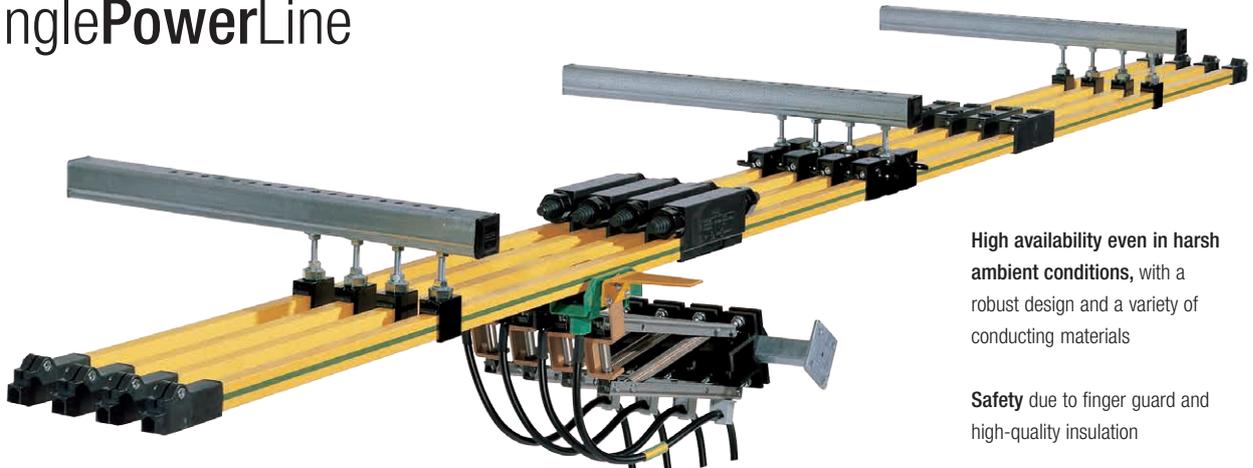

High availability even in harsh ambient conditions, with a robust design and a variety of conducting materials

Safety due to finger guard and high-quality insulation

Simple, precise installation with single-pole and combinable multi-pole hanger clamps (3, 4, and 5 poles)

Unlimited number of poles, even for complex applications

Curve capability using arc segments

Flexible extension and optional positioning system

Main applications:



- Crane systems of medium load capacity
- People movers
- Specialized systems




1:1 scale

Standard application data

Nominal current range (100% duty cycle)	25 A 200 A 250 A 320 A 400 A
Nominal voltage	690 V (hand area 500 V) with insulators up to 1000 V
Rail length	4000 mm
Outer dimensions (pole)	18 x 26 mm
Area of use	Indoor or outdoor area
Rail layout	Straight (arc segments possible)
Installation orientation	Collector insertion preferably from below



SinglePowerLine

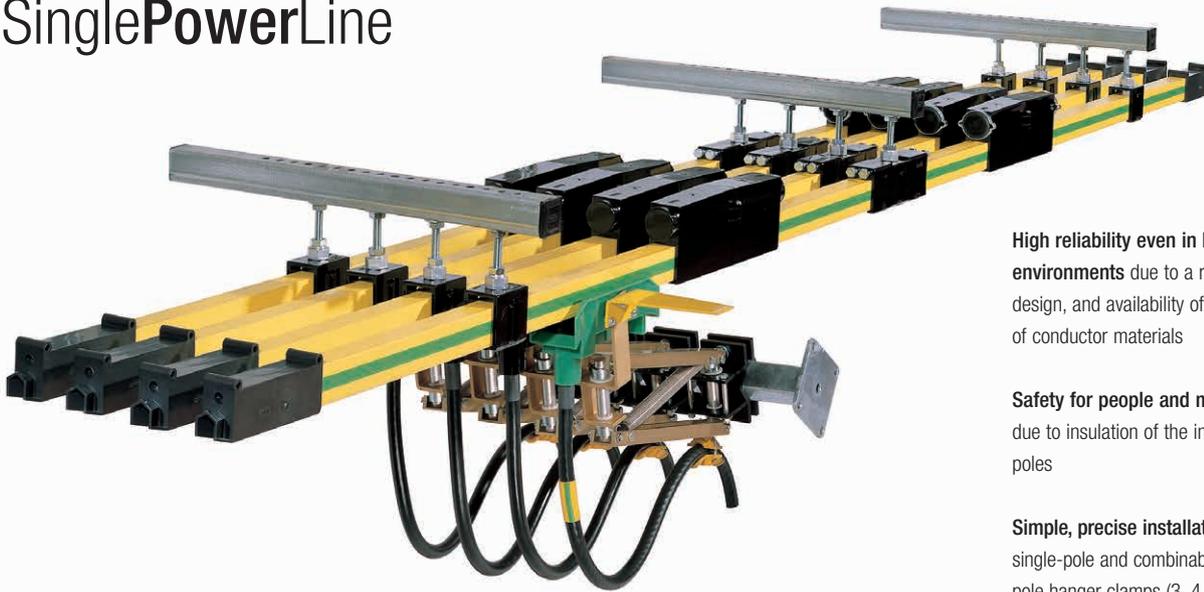


High reliability even in harsh environments due to a robust design, and availability of a variety of conductor materials

Safety for people and machines due to insulation of the individual poles

Simple, precise installation with single-pole and combinable multi-pole hanger clamps (3, 4, and 5 poles)

Main applications:



- Heavy-duty crane systems
- Cable-driven STS crane carriage systems
- People movers
- Specialized systems

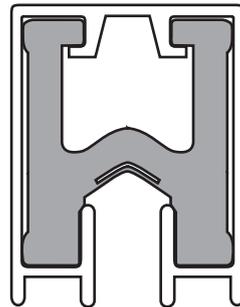


1:1 scale

Standard application data

Nominal current range (100% duty cycle)	200 A 320 A 500 A 800 A 1000 A 1250 A
Nominal voltage	690 V with insulators up to 1000 V
Rail length	5000 mm
Outer dimensions (pole)	32 x 42 mm
Area of use	Indoor or outdoor area
Rail layout	Preferably straight (arc segments possible)
Installation orientation	Collector insertion preferably from below



MultiLine

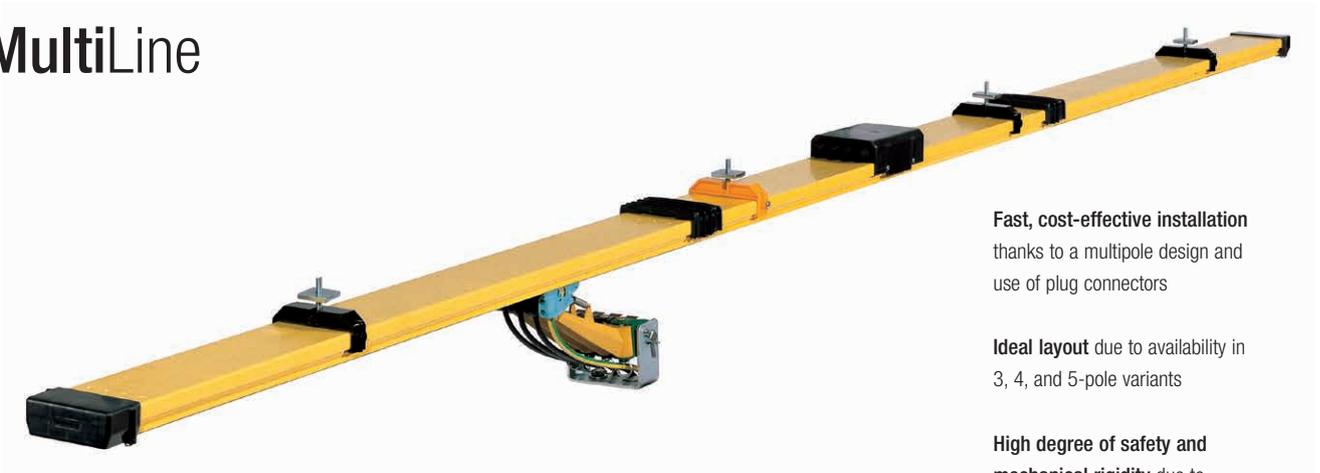

Fast, cost-effective installation thanks to a multipole design and use of plug connectors

Ideal layout due to availability in 3, 4, and 5-pole variants

High degree of safety and mechanical rigidity due to massive shared insulators


Low mass due to compact design and optimized phase distance

Maintenance-friendly due to fast exchange of rail segments and simple cleaning of the compact profile

Flexible extension and optional positioning system

Main applications:



- High storage systems
- Process and hall cranes
- Specialized machines
- Transfer cars

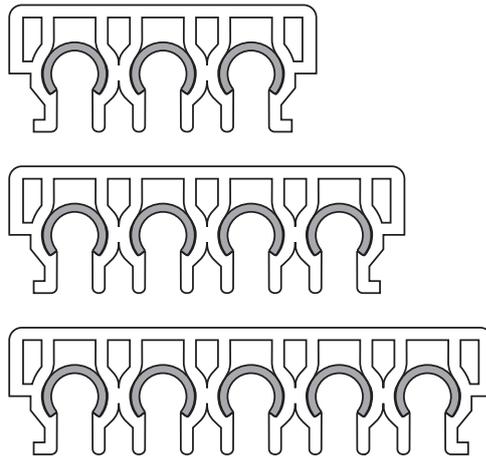

1:1.5 scale

Standard application data


Nominal current range (100% duty cycle)	10 A 32 A 60 A 100 A 125 A
Nominal voltage	690 V
Rail length	4000 mm
Outer dimensions (pole)	3-pole: 26 x 62 mm 4-pole: 26 x 80 mm 5-pole: 26 x 98 mm
Area of use	Indoor or protected outdoor area
Rail layout	Linear
Number of poles	Any; can be combined from 3, 4, and 5-pole rails
Installation orientation	Collector insertion from the side or bottom vertical or horizontal possible



Conductix-Wampfler Conductor Rails



MultiLine

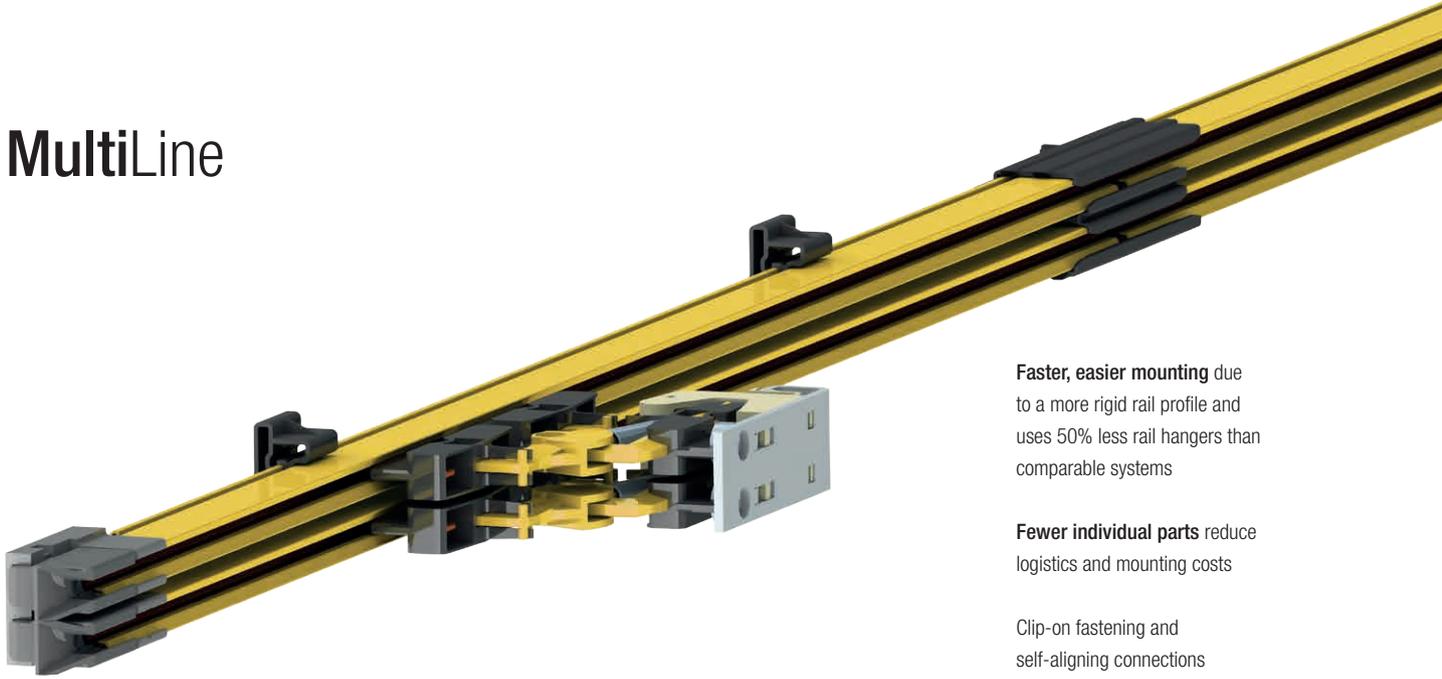

Faster, easier mounting due to a more rigid rail profile and uses 50% less rail hangers than comparable systems

Fewer individual parts reduce logistics and mounting costs


Clip-on fastening and self-aligning connections **reduce installation complexity**

Easily expandable in length and in number of poles

Higher stability through two-pole build and hollow chamber structure

Main applications:

- Automated small parts warehouses
- Shuttle systems


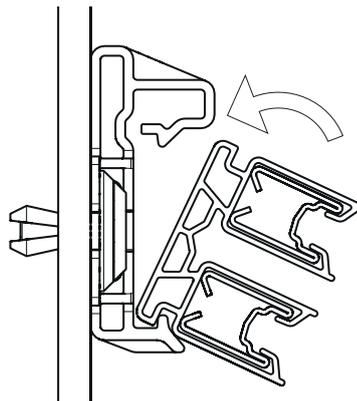


1:1 scale

Standard application data


Nominal current range (100% duty cycle)	Whole system: 32 A
Nominal voltage	230/400 V AC – safety-/low voltage min. 24 up to max. 48 V DC/AC
Rail length	4000 mm +/-2 mm at 20°C
Outer dimensions	98 x 38 mm incl. system fastener and current collector
Area of use	Indoors
Rail layout	Linear
Number of poles	2 poles (can be expanded in increments of two)
Installation orientation	Collector insertion from the side horizontal installation

Program
0835



Special characteristics:

Installation in a few, mostly tool-free steps. Fastening positions are well defined and tactile to cope with the often reduced light/visibility in warehouse aisles.





BoxLine



Fast, cost-effective installation due to multipole design, use of different connector technologies, and simple clip-on hanger clamps

Ideal layout thanks to availability of 4, 5, 6, and 7-pole systems


Highest possible safety using box system (optionally with a sealing lip)

Small dimensions due to compact design

High flexibility, with availability as insertion, clamp, bumper, or plug system

Main applications:


- Crane systems
- Building maintenance units
- Greenhouses
- Workplace systems

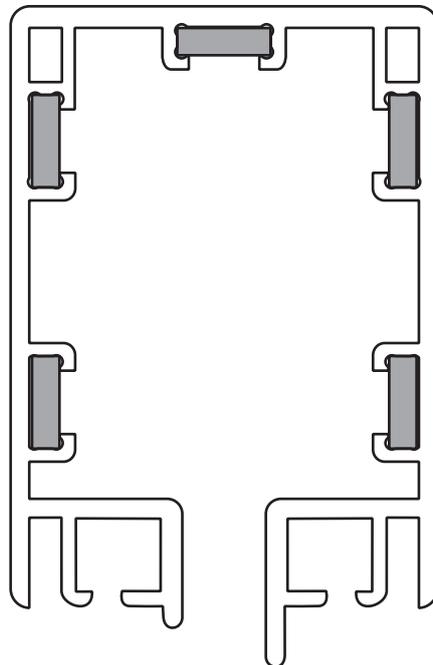

1:1 scale

Standard application data

Nominal current range (100% duty cycle)	10 A 35 A 60 A 100 A 140 A (80% duty cycle)
Nominal voltage	690 V
Rail length	4000 mm
Outer dimensions (pole)	56 x 90 mm
Area of use	Indoor or outdoor area
Rail layout	Straight / curved tracks possible using factory-supplied arc elements
Number of poles	4, 5, 6, or 7 poles
Installation orientation	Collector insertion from below



Perfect Interplay

Components designed to work together and the right accessories are the basis of any good system solution.

The right selection of system extension components allows you to account for a variety of operational requirements.

Original accessories from Conductix-Wampfler increase safety, availability, and the lifetime of the entire conductor rail system.



Fast Ethernet
with integrated leaky coax cable




Collector brush sensor unit for
external wear control




SinglePowerLine 0812 in a galvanizing plant with bridge elements on a turning gate and dual collector assemblies



Integrated barcode system on EcoClickLine conductor rail system

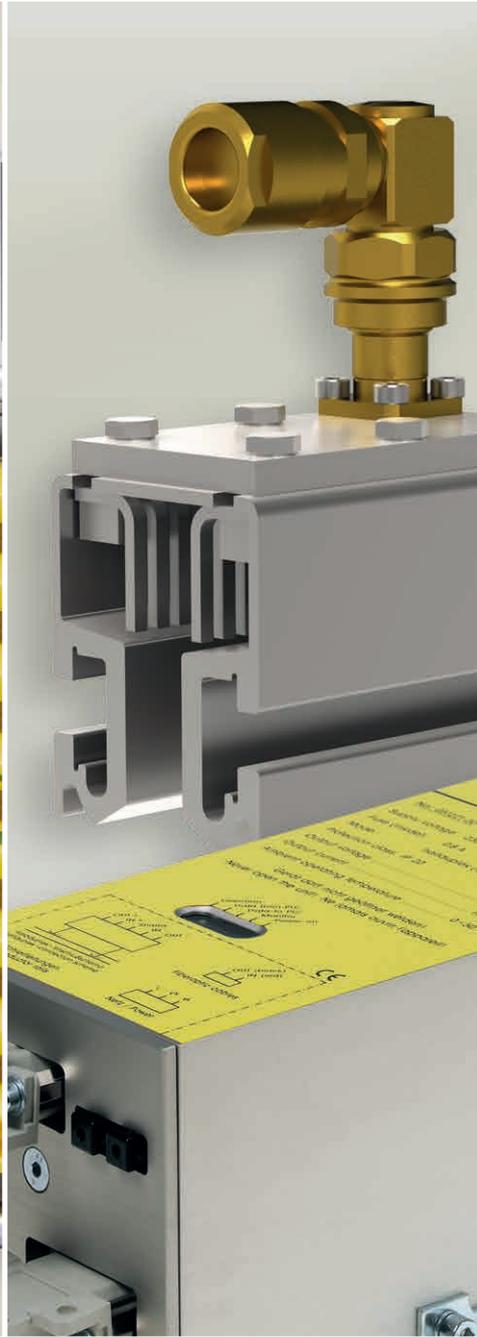

Data transmission via conductor rail with ProfiDAT® or Powertrans 1b® – up to 100 Mbit/s

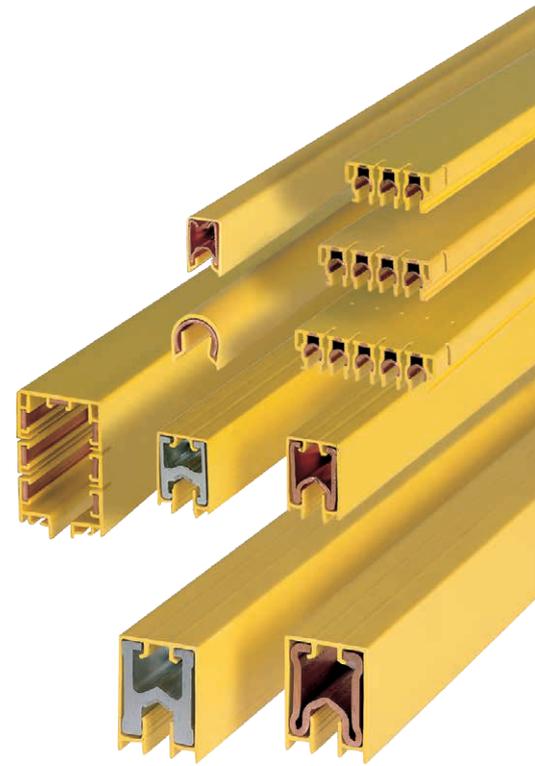

A wide variety of different systems and conductor materials guarantees the right conductor rail for any application



Custom-Services

Need more?

When you're talking to us about conductor rails, there's more! Whether you need more information, are looking for a solution to fit your needs, or require support on-site. We speak your language.

Talk to us – we have a solution for you!

Project planning

- Handling task specifications and parameters, and the layout of the system

Commissioning and preliminary assembly

- Preliminary assembly and assembly-oriented packaging.

Assembly and commissioning

- Installation, commissioning, and training by our technicians before being handed over to the customer



Rental service and supervisor

- Provision of assembly systems and special tools for the efficient installation of our systems
- Support as needed by an experienced supervisor from our service team

Service and maintenance

- Regular inspection of the system, replacement of wearing parts
- Cleaning and testing
- Assembly and maintenance training
- Supervision



Conductix-Wampfler's specialists provide complete support from the initial programming and design to the final assembly on site – worldwide!



Your Applications – Our Solutions

Conductor Rail Systems from Conductix-Wampfler represent only one of the many solutions made possible by the broad spectrum of Conductix-Wampfler components for the transport of energy, data, gases, and fluids. The solutions we deliver for your applications are based on your specific requirements. In many cases, a combination of several different Conductix-Wampfler systems can prove advantageous. You can count on all of Conductix-Wampfler's Business Units for hands-on engineering support – coupled with the perfect solution to meet your energy management and control needs.



Festoon systems

It's hard to imagine Conductix-Wampfler cable trolleys not being used in virtually every industrial application. They're reliable and robust and available in an enormous variety of dimensions and designs.



Conductor rails

Whether they're enclosed conductor rails or expandable single-pole systems, the proven conductor rails by Conductix-Wampfler reliably move people and material.



Non-insulated conductor rails

Extremely robust, non-insulated conductor rails with copper heads or stainless steel surfaces provide the ideal basis for rough applications, for example in steel mills or shipyards.



Slip ring assemblies

Whenever things are really "moving in circles", the proven slip ring assemblies by Conductix-Wampfler ensure the flawless transfer of energy and data. Here, everything revolves around flexibility and reliability!



Motorized Cable & Hose Reels

Motorized reels by Conductix-Wampfler hold their own wherever energy, data, media and fluids have to cover the most diverse distances within a short amount of time – in all directions, fast and safe.



Spring Cable & Hose Reels

With their robust and efficient design Spring Cable and Hose Reels from Conductix-Wampfler are unbeatably reliable in supplying energy, signals, data and fluids to a vast range of tools, cranes and vehicles.



Inductive Power Transfer IPT®

The no-contact system for transferring energy and data. For all tasks that depend on high speeds and absolute resistance to wear.



Retractors and Balancers

Our wide range of high reliable retractors and balancers remove the load from your shoulders and allow you to reach top productivity.




Energy guiding chains

The "Jack of all trades" when it comes to transferring energy, data, air and fluid hoses. With their wide range, these energy guiding chains are the ideal solution for many industrial applications.



Jib booms

Complete with tool transporters, reels, or an entire media supply system – here, safety and flexibility are key to the completion of difficult tasks.

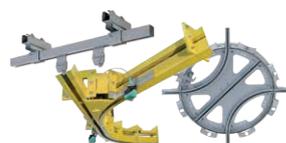

Conveyor systems

Whether manual, semiautomatic or with Power & Free – flexibility is achieved with full customization concerning layout and location.

www.conductix.com

Conductix-Wampfler

has just one critical mission:

To provide you with energy and data transmission systems that will keep your operations up and running 24/7/365.

To contact your nearest sales office, please refer to:

**[www.conductix.com/
contact-search](http://www.conductix.com/contact-search)**



Ⓞ DELACHAUX GROUP